

# RODAJA DE ACERO INOX. CON FRENO TOTAL



This is the total lock stainless steel version of our 17 / 18 / 19 Series, all metal parts are made of 304 stainless steel, especially made for sanitary applications and long service life; offering exceptional resistance against rust and corrosion and are 100% washable. Total-lock brake design provides a way to simultaneously lock both the swivel raceway and the wheel with the depression of a single pedal; making the unit stationary. These casters are commonly used in the following industries: food processing, food service, laboratories, hospitals, institutions, pharmaceutical plants, and other "clean" applications that require casters to be washed down on a frequent basis.

- Total-lock brake simultaneously locks both the swivel & wheel making the rolling unit stationary and more stable than when using just wheel brakes.
- All metal parts are 100% 304 Stainless Steel.
- Stainless Steel extends service life & offers resistance against rust & corrosion.
- Double ball raceways offer improved swiveling action and durability.
- Fork and leg assembly designed and formed for maximum durability and long term service.
- NSF Listed.



## Brake Options for S9 Series



Tech Lock Pedal Brake (H)



Top Lock Brake (T)

## Other Options


Thread Guards	G
Zerk Axle	Z
Directional Lock	P

### Fastening Options (Replace \*\* in part number with desired plate or stem code)

Plate Code	Overall Size	Bolt Hole Pattern	Mounting Bolt Size
06	2-3/8 x 3-5/8	1-3/4 x 2-7/8 slotted to 3	5/16
11	3-1/8 x 4-1/8	1-3/4 x 2-15/16 slotted to 2-3/8 x 3-3/8	3/8

Order modular stems installed with stem code -or- uninstalled by part#				Permanently attached stems		
Stem Code	Size	Stem Type	Modular Stem Part#	Stem Code	Size	Stem Type
ZZ	1/2"	Hollow king pin - No fastener	S7ST041	67	1/2-13 x 1	Threaded
41	.875 x 2-1/4	Octagon w/ Grip Ring	S7ST041	68	1/2-13 x 1-1/2	Threaded
51	3/4 x 2	Square w/ 3 cross drilled holes	S7ST551	70	1-1/2-13 x 2-3/4	Threaded
57	3/4 x 2	Round w/ 3 cross drilled holes	S7STR57	71	.720 - .851	Expandable Adapter
91	7/16 x 1-3/8	Grip Ring	S7STC91	72	.852 - .927	Expandable Adapter
95	.846 x 2-3/16	Grip Ring	S7STC95	73	.928 - 1.029	Expandable Adapter
S1	1/2-13 X 4	Threaded	S7STTS1	74	1.030 - 1.140	Expandable Adapter
S2	5/8-11 x 4	Threaded	S7STTS2	75	1.360 - 1.425	Expandable Adapter
S3	3/4 - 10 x 6	Threaded	S7STTS3	76	1.426 - 1.589	Expandable Adapter
S4	3/4 - 10 x 8	Threaded	S7STTS4	77	1.790 - 1.850	Expandable Adapter
S5	3/4 - 10 x 10	Threaded	S7STTS5			

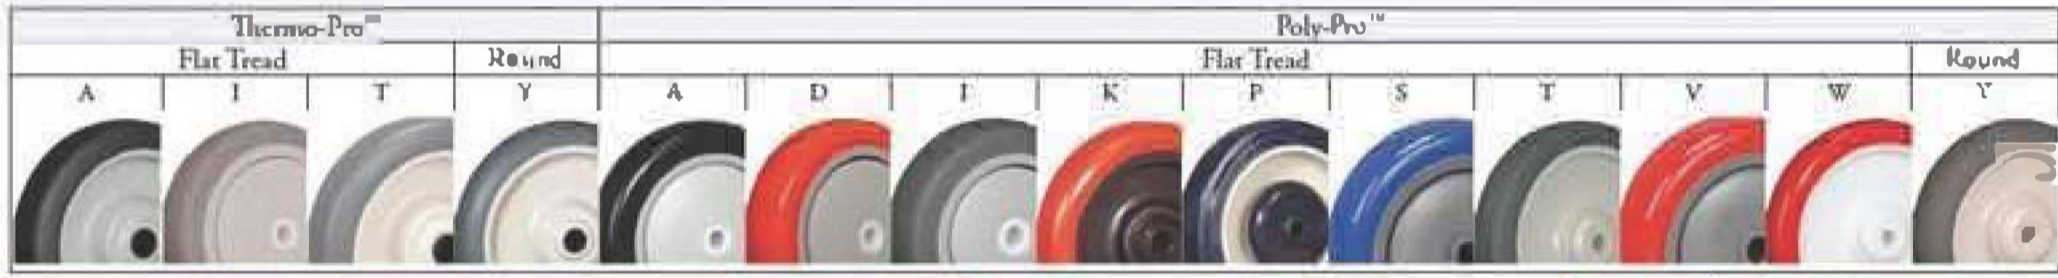

# RODAJA DE ACERO INOX. CON FRENO TOTAL



Wheel Diameter	Tread Width	Wheel Type	Load Capacity	Bearing Type	Total Lock Swivel Caster Part#	Swivel Radius	Rigid Caster Part#	Swivel Radius	Swivel Caster Part#	Overall Height	Color
3	1-1/4	Soft Rubber	175	Plain	S7SR30CB82**YY	4-3/8	S8SR30CB82**YY	3	S9SR30CB82**YY	4-1/4	T, Y A, D, J, S, V K, W T, W, Y T, Y
		Thermo-Pro™	210	f Ball	S7TP30C144**YY		S8TP30C144**YY		S9TP30C144**YY		
		Thermo-Pro™	210	f Ball	S7TP30C-47**YY		S8TP30C-47**YY		S9TP30C-47**YY		
		Thermo-Pro™	210	Sleeve	S7TP30C-90**YY		S8TP30C-90**YY		S9TP30C-90**YY		
		Poly-Pro™	250	f Ball	S7PP30C-44**YY		S8PP30C-44**YY		S9PP30C-44**YY		
		Poly-Pro™	250	Delrin	S7PP30C-55**YY		S8PP30C-55**YY		S9PP30C-55**YY		
		Poly-Pro™	250	f Ball	S7PP30C-47**YY		S8PP30C-47**YY		S9PP30C-47**YY		
		Poly-Pro™	250	Sleeve	S7PP30C-90**YY		S8PP30C-90**YY		S9PP30C-90**YY		
		Duralastomer®	300	Sleeve	S7SU30CL90**YY		S8SU30CL90**YY		S9SU30CL90**YY		
		Hard Rubber	275	Plain	S7HR30CB82**YY		S8HR30CB82**YY		S9HR30CB82**YY		
		Polyolefin	250	Plain	S7PO30C-82**YY		S8PO30C-82**YY		S9PO30C-82**YY		
		Polyolefin	300	Sleeve	S7PO30C-90**YY		S8PO30C-90**YY		S9PO30C-90**YY		
		H.D Polyolefin	300	Plain	S7HP30C-82**YY		S8HP30C-82**YY		S9HP30C-82**YY		
		Nylon	300	Plain	S7NY30CE82**YY		S8NY30CE82**YY		S9NY30CE82**YY		
Phenolic	300	SS Top Hats	S7PH30CB97**YY	S8PH30CB97**YY	S9PH30CB97**YY						
H.T. Phenolic	200	SS Top Hats	S7HT30CQ97**YY	S8HT30CQ97**YY	S9HT30CQ97**YY						
BrimStone®	250	SS Top Hats	S7GN30CQ97**YY	S8GN30CQ97**YY	S9GN30CQ97**YY						
Phenolic	350	Sleeve	S7PH30HB90**YY	S8PH30HB90**YY	S9PH30HB90**YY						
3.1/2	1-1/4	Soft Rubber	200	Plain	S7SR35CB82**YY	4-3/8	S8SR35CB82**YY	3-3/16	S9SR35CB82**YY	4-3/4	T, Y A, D, J, S, V K, W T, W, Y T, Y
		Thermo-Pro™	230	f Ball	S7TP35C144**YY		S8TP35C144**YY		S9TP35C144**YY		
		Thermo-Pro™	230	f Ball	S7TP35C-47**YY		S8TP35C-47**YY		S9TP35C-47**YY		
		Thermo-Pro™	230	Sleeve	S7TP35C-90**YY		S8TP35C-90**YY		S9TP35C-90**YY		
		Poly-Pro™	250	f Ball	S7PP35C-44**YY		S8PP35C-44**YY		S9PP35C-44**YY		
		Poly-Pro™	250	Delrin	S7PP35C-55**YY		S8PP35C-55**YY		S9PP35C-55**YY		
		Poly-Pro™	250	f Ball	S7PP35C-47**YY		S8PP35C-47**YY		S9PP35C-47**YY		
		Poly-Pro™	250	Sleeve	S7PP35C-90**YY		S8PP35C-90**YY		S9PP35C-90**YY		
		Hard Rubber	285	Plain	S7HR35CB82**YY		S8HR35CB82**YY		S9HR35CB82**YY		
		Polyolefin	300	Plain	S7PO35C-82**YY		S8PO35C-82**YY		S9PO35C-82**YY		
		Polyolefin	300	Sleeve	S7PO35C-90**YY		S8PO35C-90**YY		S9PO35C-90**YY		
		H.D Polyolefin	300	Plain	S7HP35C-82**YY		S8HP35C-82**YY		S9HP35C-82**YY		
		Nylon	350	SS Top Hats	S7PH40CB97**YY		S8PH40CB97**YY		S9PH40CB97**YY		
		Phenolic	350	SS Top Hats	S7PH40CB97**YY		S8PH40CB97**YY		S9PH40CB97**YY		
H.T. Phenolic	200	SS Top Hats	S7HT40CQ97**YY	S8HT40CQ97**YY	S9HT40CQ97**YY						
BrimStone®	250	SS Top Hats	S7GN40CQ97**YY	S8GN40CQ97**YY	S9GN40CQ97**YY						
Phenolic	350	SS Top Hats	S7PH35CB97**YY	S8PH35CB97**YY	S9PH35CB97**YY						
4	1-1/4	Soft Rubber	220	Plain	S7SR40CB82**YY	4-3/8	S8SR40CB82**YY	3-1/2	S9SR40CB82**YY	5-1/4	T, Y A, D, J, S, V K, W T, W, Y T, Y
		Thermo-Pro™	250	f Ball	S7TP40C144**YY		S8TP40C144**YY		S9TP40C144**YY		
		Thermo-Pro™	250	f Ball	S7TP40C-47**YY		S8TP40C-47**YY		S9TP40C-47**YY		
		Thermo-Pro™	250	Sleeve	S7TP40C-90**YY		S8TP40C-90**YY		S9TP40C-90**YY		
		Poly-Pro™	300	f Ball	S7PP40C-44**YY		S8PP40C-44**YY		S9PP40C-44**YY		
		Poly-Pro™	300	Delrin	S7PP40C-55**YY		S8PP40C-55**YY		S9PP40C-55**YY		
		Poly-Pro™	300	f Ball	S7PP40C-47**YY		S8PP40C-47**YY		S9PP40C-47**YY		
		Poly-Pro™	300	f Ball	S7PP40C-47**YY		S8PP40C-47**YY		S9PP40C-47**YY		
		Poly-Pro™	300	Sleeve	S7PP40C-90**YY		S8PP40C-90**YY		S9PP40C-90**YY		
		Duralastomer®	300	Sleeve	S7SU40CL90**YY		S8SU40CL90**YY		S9SU40CL90**YY		
		Hard Rubber	300	Plain	S7HR40CB82**YY		S8HR40CB82**YY		S9HR40CB82**YY		
		Polyolefin	300	Plain	S7PO40C-82**YY		S8PO40C-82**YY		S9PO40C-82**YY		
		Polyolefin	350	Sleeve	S7PO40C-90**YY		S8PO40C-90**YY		S9PO40C-90**YY		
		H.D Polyolefin	350	Plain	S7HP40C-82**YY		S8HP40C-82**YY		S9HP40C-82**YY		
Nylon	350	Sleeve	S7NY40CE90**YY	S8NY40CE90**YY	S9NY40CE90**YY						
Phenolic	350	SS Top Hats	S7PH40CB97**YY	S8PH40CB97**YY	S9PH40CB97**YY						
H.T. Phenolic	200	SS Top Hats	S7HT40CQ97**YY	S8HT40CQ97**YY	S9HT40CQ97**YY						
BrimStone®	300	SS Top Hats	S7GN40CQ97**YY	S8GN40CQ97**YY	S9GN40CQ97**YY						
Ste-ROLLac®	200	SS Top Hats	S7SL40CQ97**YY	S8SL40CQ97**YY	S9SL40CQ97**YY						
1-1/2	1-1/2	H.T. Phenolic	350	Sleeve	S7HT40HQ90**YY	4-3/8	S8HT40HQ90**YY	3-1/2	S9HT40HQ90**YY	5-1/4	
		BrimStone®	350	Sleeve	S7GN40HQ90**YY		S8GN40HQ90**YY		S9GN40HQ90**YY		
		Ste-ROLLac®	250	SS Top Hats	S7SL40HC62**YY		S8SL40HC62**YY		S9SL40HC62**YY		
5	1-1/4	Soft Rubber	250	Plain	S7SR50CB82**YY	4-3/8	S8SR50CB82**YY	4	S9SR50CB82**YY	6-1/4	T, Y A, D, J, S, V K, W T, W, Y T, Y
		Thermo-Pro™	300	f Ball	S7TP50C144**YY		S8TP50C144**YY		S9TP50C144**YY		
		Thermo-Pro™	300	f Ball	S7TP50C-47**YY		S8TP50C-47**YY		S9TP50C-47**YY		
		Thermo-Pro™	300	Sleeve	S7TP50C-90**YY		S8TP50C-90**YY		S9TP50C-90**YY		
		Poly-Pro™	300	f Ball	S7PP50C-44**YY		S8PP50C-44**YY		S9PP50C-44**YY		
		Poly-Pro™	300	Delrin	S7PP50C-55**YY		S8PP50C-55**YY		S9PP50C-55**YY		
		Poly-Pro™	300	f Ball	S7PP50C-47**YY		S8PP50C-47**YY		S9PP50C-47**YY		
		Poly-Pro™	300	f Ball	S7PP50C-47**YY		S8PP50C-47**YY		S9PP50C-47**YY		
		Poly-Pro™	300	Sleeve	S7PP50C-90**YY		S8PP50C-90**YY		S9PP50C-90**YY		
		Duralastomer®	350	Sleeve	S7SU50CL90**YY		S8SU50CL90**YY		S9SU50CL90**YY		
		Hard Rubber	325	Plain	S7HR50CB82**YY		S8HR50CB82**YY		S9HR50CB82**YY		
		Polyolefin	350	Plain	S7PO50C-82**YY		S8PO50C-82**YY		S9PO50C-82**YY		
		Polyolefin	350	Sleeve	S7PO50C-90**YY		S8PO50C-90**YY		S9PO50C-90**YY		
		H.D Polyolefin	350	Plain	S7HP50C-82**YY		S8HP50C-82**YY		S9HP50C-82**YY		
Nylon	350	Sleeve	S7NY50CE90**YY	S8NY50CE90**YY	S9NY50CE90**YY						
Phenolic	350	SS Top Hats	S7PH50CB97**YY	S8PH50CB97**YY	S9PH50CB97**YY						
H.T. Phenolic	350	SS Top Hats	S7HT50CQ97**YY	S8HT50CQ97**YY	S9HT50CQ97**YY						
BrimStone®	350	SS Top Hats	S7GN50CQ97**YY	S8GN50CQ97**YY	S9GN50CQ97**YY						

\* Non stainless bearing in wheel

\* Radius over all height 1/8 for stem casters